
e-Power
ADVANCED AIR MOBILITY

GOCC
GROUND OPERATIONS CONTROL CENTER

GROUND OPERATIONS CONTROL CENTER

From mission to flight

GOCC is the web application for logistics drone missions. It plans the corridor, estimates the risk to SORA 2.5 and checks which drone can do the mission.

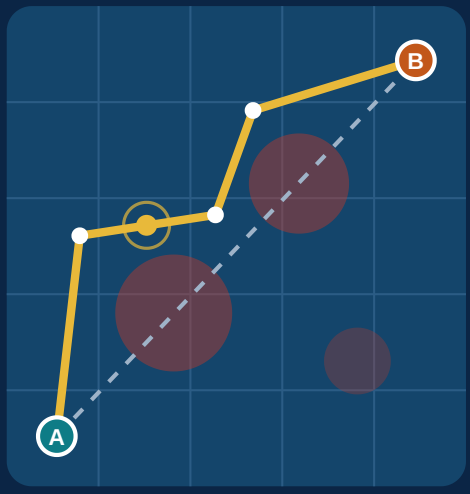

1 Low-density route

The corridor avoids the most populated areas, with WorldPop population data. The route is compared with the straight line.

2 SORA 2.5 pre-assessment

Estimates GRC, ARC and SAIL for each leg of the route. Includes mitigations M1 and M2 and shows the necessary OSOs.

3 Ground constraints

In the route pre-assessment, flight over motorways and railways has a penalty. Shows the P, R and D zones.

4 Fleet analysis

Checks payload, endurance, C2 link range and containment. Result: suitable, suitable with changes, not suitable.

5 Best-drone requirements

If no drone is suitable, GOCC lists the minimum requirements. They are the basis to buy or to build the drone.

6 ADS-L traffic on the map

A ground receiver at 868 MHz shows the ADS-L traffic near the airfield. The aircraft do not need the mobile network.

ONLINE DEMO

Try the GOCC demo

Scan the code or open the address below

gocc-aero.com

Scan for the demo

© 2026 e-Power S.r.l. GOCC is a support tool: the authorisation stays with the competent authority.

e-Power
ADVANCED AIR MOBILITY

GOCC
GROUND OPERATIONS CONTROL CENTER

ELECTRONIC CONSPICUITY · ADS-L

Mutual visibility by radio

ADS-L is an electronic conspicuity system specified by EASA. The equipped aircraft transmits its position and movement at regular intervals, and compatible receivers detect it. Thus BVLOS drone operators see the crewed traffic. The signal goes from radio to radio in the SRD860 band, between 868.2 and 869.525 MHz.



e-Power is the exclusive representative for Italy of the Talos Avionics systems.

ADS-L / Remote ID

Talos airborne module for drones and aircraft, in Medium Range and Long Range versions.

MPTS and MPTS PRO

Talos systems for crewed aircraft: ADS-L and ADS-B reception. PRO adds 4G.

Ground Base Receiver

The e-Power GBR, a ground receiver at 868 MHz, brings the traffic into GOCC.

WHAT MAKES GOCC DIFFERENT

- One environment, from the route to SORA. No transfer between tools.
- From the mission to the drone. First the mission, then the drone requirements.
- Model catalogue. Manufacturer data are checked before entry.
- Safety around the airfield. The airfield manager sees the ADS-L equipped traffic in real time.
- Simulation environment for operator training.

FUNCTIONS IN DEVELOPMENT

IN DEVELOPMENT Export of the drone requirements as a preliminary specification.

IN DEVELOPMENT Fleet analysis on corridors with more than one leg.

IN DEVELOPMENT Penalties on motorways and railways extended to all of Italy.

IN DEVELOPMENT Network of GBRs to cover the area and retransmit the traffic to the aircraft.

e-Power S.r.l.

Via Gandhi, 29, 80038 Pomigliano d'Arco (NA), Italy
Tel. +39 333 2649029 | info@e-power.aero
www.e-power.aero | gocc-aero.com

GOCC demo

© 2026 e-Power S.r.l. All rights reserved. Data and functions can change without notice.